


E12ST-Hammer "Stabilized"

TAKES SD12 SHANKS

**SPECIAL BACKHEAD FEATURES – CALL OFFICE

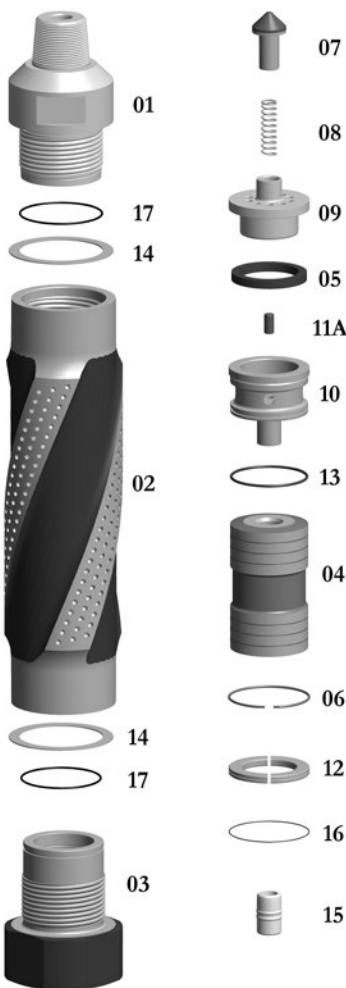

Replacement Parts

Hmr Part #	Description	Order #	Weight (lbs.)
12-01	Top Sub 6-5/8" API REG PIN w/O-Ring	E12-01	280.0
12-17	**Replacement O-Ring for Top Sub**	E12-17	0.1
12ST-02	Piston Case w/Retainer Ring	E12ST-02	536.0
12-06	**Replacement Retainer Ring for Piston Case**	E12-06	0.4
12ST-03	Driver Sub w/O-Ring	E12ST-03	153.0
12-17	**Replacement O-Ring for Driver Sub**	E12-17	0.1
12-04	Piston	E12-04	165.0
12-05	Make Up Ring	E12-05	0.8
12-07	Check Valve Dart	E12-07	3.0
12-08	Check Valve Dart Spring	E12-08	0.3
12-09	Check Valve Guide	E12-09	30.0
12-10	Rigid Valve w/O-Ring	E12-10	32.0
12-13	**Replacement O-Ring for Rigid Valve**	E12-13	0.1
12-11	Choke Set (4)	E12-11	1.6
12-11A	Blank Choke	E12-11A	0.4
12-11B	1/8" Choke	E12-11B	0.4
12-11C	1/4" Choke	E12-11C	0.4
12-11D	3/8" Choke	E12-11D	0.4
12-12	Bit Retainer Ring w/O-Ring	E12-12	7.0
12-16	**Replacement O-Ring for Bit Retainer Ring**	E12-16	0.1
12-14	Breakout Ring (2)	E12-14	1.0/ea.
12-15	Foot Valve	E12-15	0.1

Price is subject to change without notice.

		Outside Diameter		Hammer Length Pin			Bit Size Range						
		IN.	MM.	IN.	MM.	IN.	MM.						
Drill 12 Stabilized		12-13/64		310		59-1/4		1505		12-1/4 – 14		311 – 355.6	
CHOKE SIZE		100	6.9	150	10.3	200	13.8	250	17.2				
IN.	MM.	PSI	BARS	PSI	BARS	PSI	BARS	PSI	BARS				
Blank	Blank	740	21.3	1100	30.1	1550	43.90	1900	53.81				
1/8	3.18	755	21.38	1125	31.86	1580	44.75	1580	54.94				
1/4	6.35	805	22.8	1190	33.70	1670	47.29	1670	57.21				
3/8	9.53	885	25.06	1300	36.82	1815	51.40	1815	61.31				
1/2	12.70	1000	28.32	1490	42.20	2030	57.49	2030	67.40				

The above air charts are based upon ideal conditions, your results may vary.